

CTS-800

Palm-size veterinary ultrasound

Compact design & easy operation

Water proof for outdoor operation

Gravity sensor for layout change

Livestock pregnancy detection



Grid for Estimation



Different Layout



Specifications:

Monitor: 7-inch WVGA LCD monitor

Weight: 0.8 kg

Environmental rating: IP54 (main unit) IP67 (probe head)

Battery: 3 hours operating time

Display mode: B, 2B, ZOOM B, B/M, M

Depth: Max to 250mm

B gain: 0~100

Image storage: 256 frames

Cine loop: 256 frames


Image Layout: Gravity sensor for layout change (transverse/vertical)

Measurement: Distance, area, circumference, volume, angle, heart rate

Probe: L50/7.5 MHz linear rectal probe (Standard)

L65/5.0 MHz linear rectal probe (Optional)

R20/5.0 MHz micro convex probe (Optional)

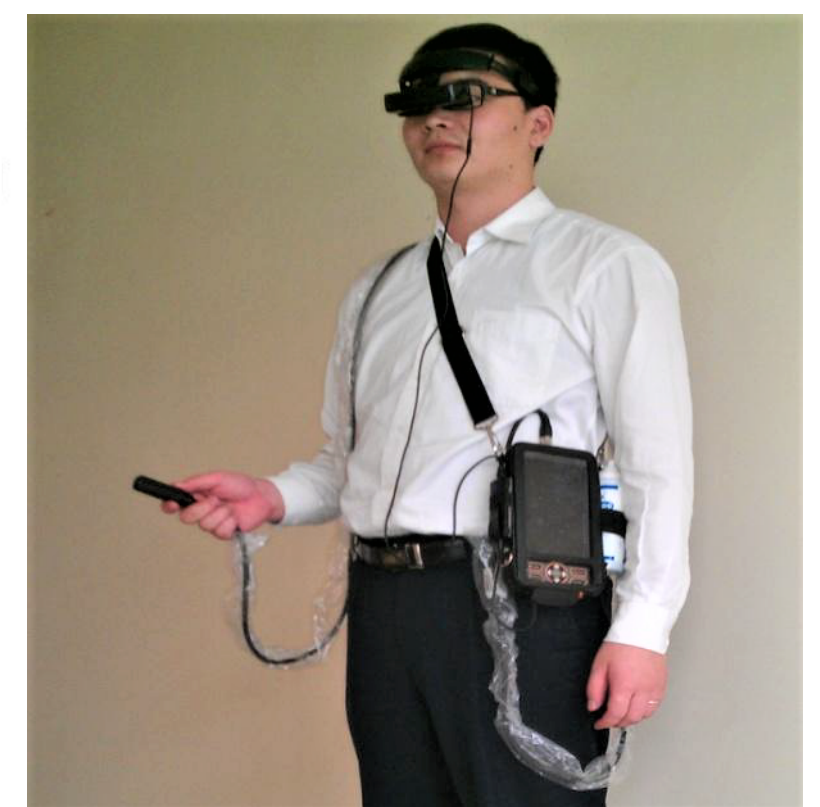

See the future
SIUI

Distributore per l'Italia:

GENERALFARM
veterinaria e zootecnia

GENERALFARM s.r.l. - Via Umbria, 32 - 42122 Reggio Emilia - Tel. 0522 514251 - Fax 0522 514376
www.generalfarm.it - e-mail: info@generalfarm.it